

Schematic Detail of PT600/150 Class D Silt Trap

SPECIFICATIONS


| | |
|----------------------|---|
| Material | 6mm MDPE |
| Chamber Capacity | 130 Litres |
| Outlet Size | 150mm |
| Silt Basket Material | 8mm MDPE |
| Treatable Flow Rate | 5 Litres/sec |
| Grate | Class D Heavy Duty Galvanised |
| Silt Capacity | 50 Litres - Basket 40 Litres - Chamber |
| Sediment Removal | > 99% |
| | > 0.3mm mesh |

Available Options


- 100mm Outlet
 - 100mm Outlet In Base
 - Class 'B' Grate
 - Class 'C' Grate
- Note: Inverts will change. Request details if required.

PROCESS DETAILS

A Fox Model PT600 Silt Trap is ideal for installation in an indoor wash bay or outdoor areas with no vehicle access. The Silt Trap has a basket with approximately 50 litres capacity which is easy to remove, ensuring simple, low cost servicing and maintenance. If the intensity of rainfall exceeds the flow capacity of the silt basket or bad housekeeping has allowed basket to become full, water will back-up onto the catchment area. For applications where this is not acceptable a high flow basket should be used.

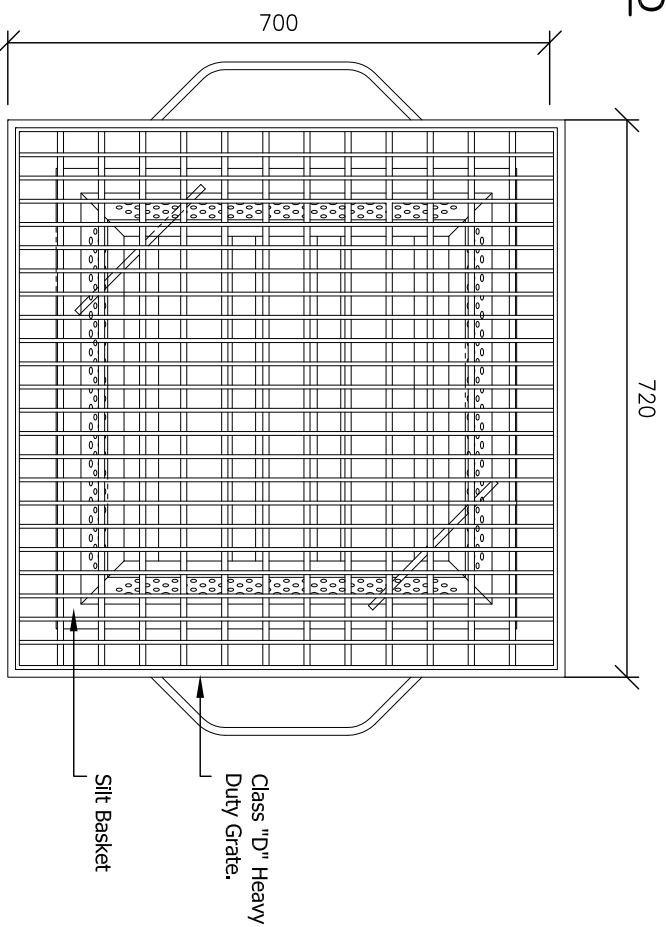

Plan

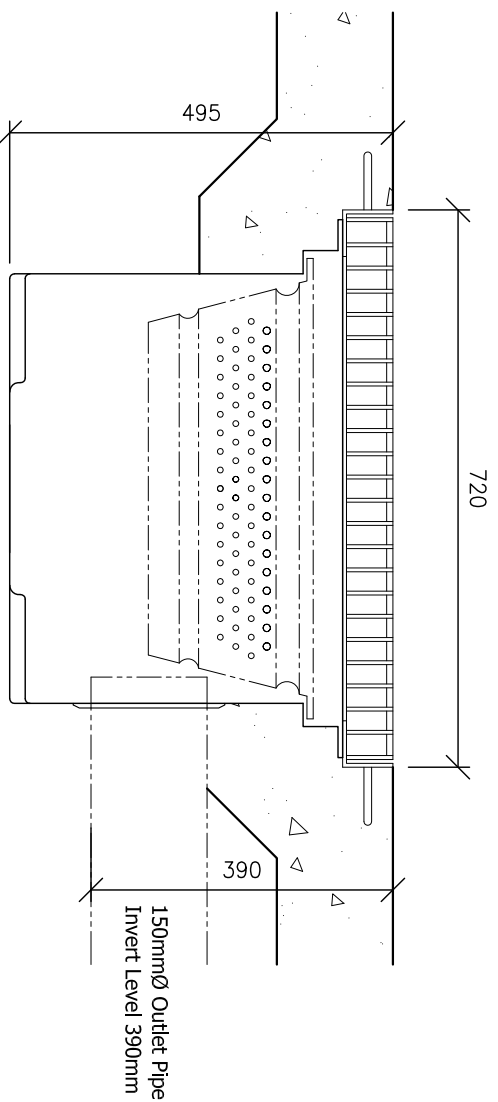

Elevation



This is a schematic representation only. Slab size and gradient to engineers details as arranged by customer. All plumbing and electrical connections to be installed by certified tradesmen in accordance with relative authorities requirements. Tradesmen to be engaged by the purchaser. System to be approved by relative Local Authorities before Installation.

This Drawing and design is the Property of Fox Environmental Systems Pty Ltd. It must not be used for any other purpose than that for which it was issued.

| | |
|----------------------|-----------------------|
| Project | System Specifications |
| Drawing Title | PT600/150 Class D |

| | |
|--------------------|----------------|
| Drawn by: | J.F.S |
| Date: | 14/01/2010 |
| Scale: | 1:10 |
| Drawing No: | A4-SPEC-1013/3 |